
Laserliner


# SuperCross-Laser Pocket




## Stylish green cross line laser with compact design, integrated 3-leg tripod and 1/4" thread – use of recycled material

This stylish cross line laser with integrated 3-leg tripod is the ideal solution for precise indoor applications. It projects a highly visible green laser cross for accurate horizontal and vertical alignment. Whether hanging pictures, shelves, curtain rails, mirrors or wall decorations – this compact laser ensures precise results with minimal effort. A clearly visible optical signal on the housing surface prevents measurement errors and warns when the device is outside the self-levelling range. The lithium-ion battery can be conveniently and quickly charged via the USB-C interface.

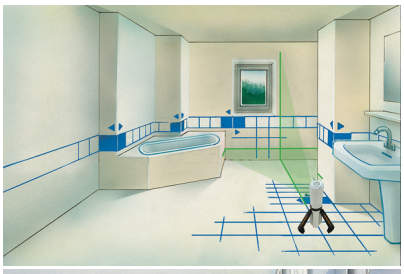

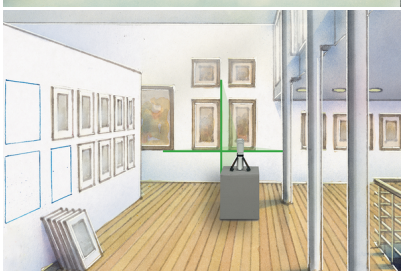

- Stylish and compact – precision meets modern design
- Perfect for horizontal and vertical alignment of pictures, shelves, mirrors or wall decorations
- Integrated 3-leg tripod for optimal positioning
- Good visibility through green laser technology
- Rechargeable lithium-ion battery via USB-C cable
- Easy alignment of slopes with manual tilt function
- Particularly compact design
- Time-saving automatic alignment
- 1/4" tripod connection
- Optical signal warns when the device is outside the levelling range
- Pendulum restraint for safe transport
- Housing with recycled content









Laser 515 nm | Class 2 | 6x | PowerGreen Laser | Automatic Level | 1/4" | USB-C | Li-Ion Battery | Recharge

### TECHNICAL DATA

| | |
|---|---|
| **Self-Levelling Range** | ± 3° |
| **Accuracy** | ±0.4 mm/m |
| **Levelling** | horizontal automatic |
| **Visibility (Typical)*** | 40 m |
| **Laser Wavelength** | 515 nm |
| **Laser Class** | 2 / < 1 mW |
| **Power Supply** | Li-ion battery pack 3.7V / 1.0Ah / 3.7Wh |
| **Operating Time** | approx. 6 hours |
| **Operating Conditions** | -10°C … 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level |
| **Storage Conditions** | -20°C … 70°C, max. humidity 80% rH |
| **Dimensions (W x H x D)** | 35 mm x 160 mm x 40 mm |

### SCOPE OF DELIVERY




| Item No. 081.124E | GTIN (EAN) 4021563737420 | SU 8 |
|---|---|---|

UMAREX GmbH & Co. KG • Laserliner • Gut Nierhof 2 • 59757 Arnsberg • Germany • Tel. +49 2932 9004-0 • info@laserliner.com • www.laserliner.com